


Universal Single Jacket LS0H Central Loose Tube Cable with Fiberglass Reinforcement EXO-G0

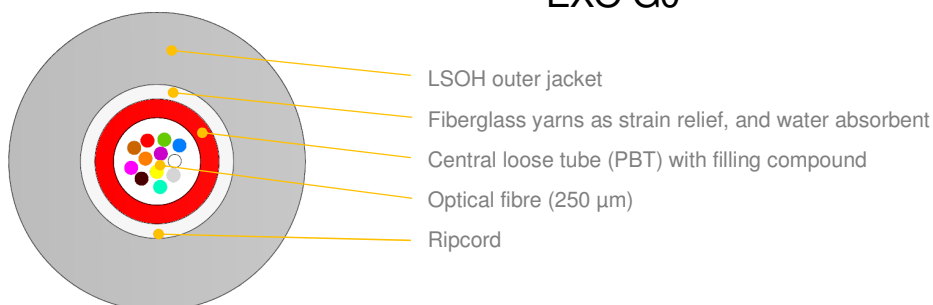

*schematic drawing, not to scale

APPLICATION:

Internal installation
 External installation into teletechnical ducts
 Fully dielectric cable
 Basic rodent protection
 LAN and FTTX networks
 Distribution network
 ODF connections

DESIGN:

Central loose tube (PBT) with filling compound
 Optical fibres
 Fiberglass as strain relief and water absorbent
 LS0H outer jacket

CONFIGURATION:

Version	Quantity [pcs]		Ø nominal (±5%) [mm]	Nominal weight (±5%) [kg/km]
	Fibres	Fibres per tube		
1T x 2F	2	2	5,9	37
1T x 4F	4	4	5,9	37
1T x 6F	6	6	5,9	37
1T x 8F	8	8	5,9	37
1T x 12F	12	12	5,9	38
1T x 16F	16	16	5,9	38
1T x 18F	18	18	5,9	38
1T x 24F	24	24	5,9	40

*Other fibre counts available on demand

OPTICAL FIBRE AND LOOSE TUBE COLOUR IDENTIFICATION

For optical fibres and loose tube identification information please see DSH_Colors_CODE_XXXX document.

FIBRE PARAMETERS

For selected post-production optical fibres parameters please see DSH_OFP document.

TECHNICAL AND ENVIRONMENTAL CABLE CHARACTERISTICS

Max tensile load short term		IEC 60794-1-21-E1, $\Delta\alpha \leq 0,05$ dB/km	1500 N ($\epsilon_f=0,33\%$) / 2200 N ($\epsilon_f=0,50\%$)
Max tensile load long term		IEC 60794-1-21-E1, $\Delta\alpha \leq 0,05$ dB/km	500 N
Crush performance		IEC 60794-1-21-E3, $\Delta\alpha \leq 0,05$ dB	1500 [N/10 cm]
Bending performance		IEC 60794-1-21-E11, $\Delta\alpha \leq 0,05$ dB	10 cycles (15x D)
Water penetration		IEC 60794-1-22-F5, no leakage	Water head: 1m Sample length: 3m Time: 24 hrs
Temperature range	Installation	IEC 60794-1-22-F1, $\Delta\alpha \leq 0,05$ dB/km	-5... +55 [°C]
	Operation		-20... +70 [°C]
	Transport & Storage		-20... +70 [°C]
CPR class		EN 50575:2014+A1:2016	Eca

(*) values for single-mode fibres, all optical measurements performed at 1550nm

MARKING

The following print (inkjet) is applied at 1-meter intervals.

- Handset symbol
- CPR Euro Class
- Double Sine symbol

- Supplier FIBRAIN
- Type of cable
- Year of manufacture: xxxx
- Standard code (Product type, fibre type, fibre count)
- Length marking in meters
- Cable ID / Drum No

Example: "HANDSET" - EN 50575 Eca - " DOUBLE SINE" - FIBRAIN - Fibre Optic Cable - " YEAR OF MANUFACTURE - EXO-G0 12F G652D CT 3.2 LSOH
– "LENGTH MARKING"- "BATCH NUMBER"

The accuracy of marking is $\pm 0.5\%$. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

PACKAGING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Rotation direction arrow will be marked on the drum together with identification information.


DELIVERY LENGTH

2000 – 8000 meters $\pm 5\%$, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed

STANDARD OUTER JACKET COLOURS:




Black RAL 9005



Light Grey RAL 7037


OUTER JACKET COLOUR OPTIONS*:

SM G.652D




RAL 1021

SM G657A1, A2, A3




RAL 9010

MM 50/125 OM2




RAL 2003

MM 50/125 OM3



RAL 6027

MM 50/125 OM4



RAL 4003

*On request.

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.