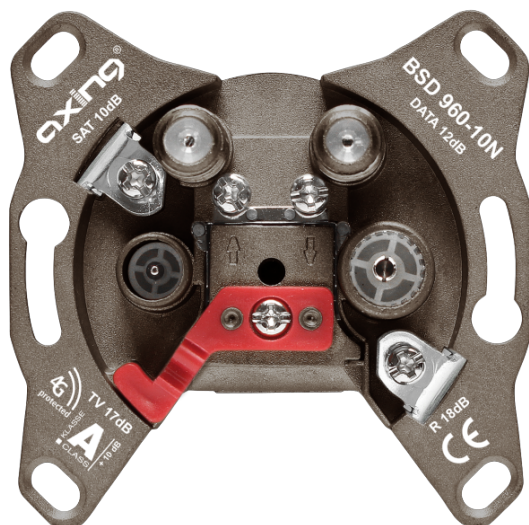


BSD 960-10N Multimedia loop-through outlet 10 dB | 5...2200 MHz | CATV | DATA | SAT


- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ Suitable for broadband return path
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F sockets
- ✓ Surface treaded

Order information

Type	BSD 960-10N
Order no.	BSD96010N
GTIN	7611682003420
PE	1
VE	1
EU customs tariff number	85291095


Technical data

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Trunk line	
Frequency range input	5...2200 MHz
Through loss @ 5...2200 MHz	≤ 3.7 dB
Frequency range output	5...2200 MHz
Suitable cables (Inner conductor outer diameter)	0.63...1.13 mm 4.70...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	109...862 MHz
Tap loss	17 dB ±1.5 dB
Radio connector	
Connector type	IEC-female
Frequency range	87.5...125 MHz
Tap loss	18 dB ±1.5 dB
SAT connector	
Connector type	F-female
Frequency range	950...2200 MHz
Tap loss	10 dB ±1.5 dB
DATA connector	
Connector type	F-female
Frequency range	5...862 MHz
Tap loss	12 dB ±1.5 dB
Isolation TV↔DATA @ 5...65 MHz	≥ 60 dB
Isolation TV↔DATA @ 109...1006 MHz	≥ 25 dB
General	
Dimensions (W × H × D) appr.	68 × 68 × 39 mm
Weight	0.082 kg

Example of use


SAT

CATV

DOCSIS

Potentialausgleich

Equipotential bonding

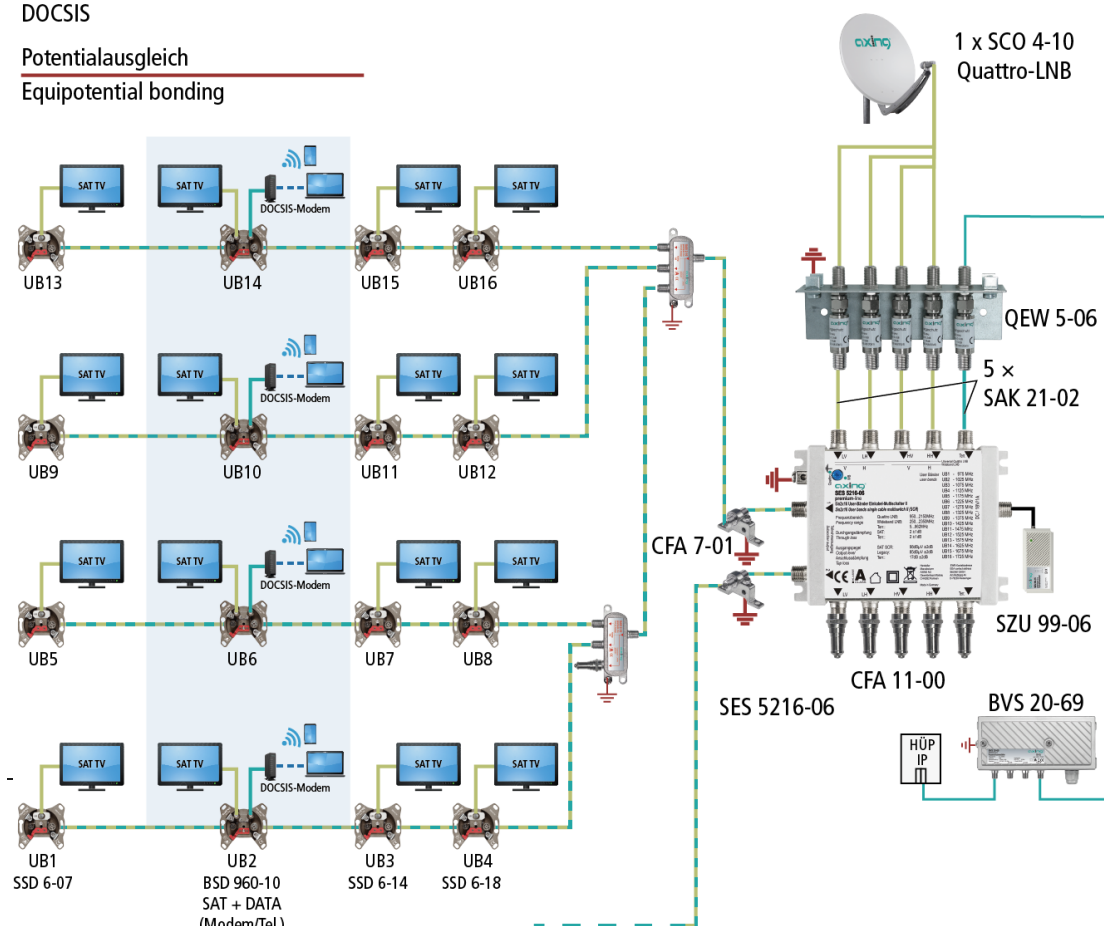

Suitable products

SZU 2-02 Cover plate | TV/R/SAT/DATA | single piece

TZU 1-00 Surface frame

SZU 2-12 Cover plate | TV/R/SAT/DATA | two-parts

TZU 1-10 Surface frame