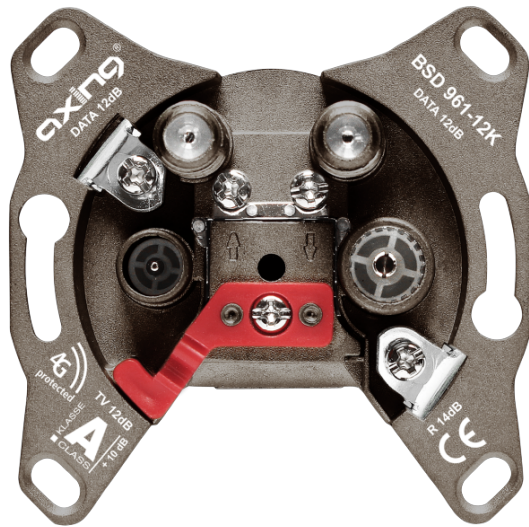


BSD 961-12K Multimedia loop-through outlet 12 dB | 5...1006 MHz | CATV | DATA | DATA


- ✓ Class A (+10 dB) according to EN 50083-2
- ✓ High intermodulation suppression
- ✓ Suitable for broadband return path
- ✓ Easy to install
- ✓ Stripping length 8/13 mm
- ✓ Extended F sockets
- ✓ Surface treaded

Order information

Type	BSD 961-12K
Order no.	BSD96112K
GTIN	7611682005264
PE	1
VE	1
EU customs tariff number	85291095


Technical data

Screening factor acc. to EN 50083-2	Class A (+ 10 dB)
Trunk line	
Frequency range input	5...1006 MHz
Through loss @ 5...1006 MHz	≤ 4.5 dB
Frequency range output	5...1006 MHz
Suitable cables (Inner conductor outer diameter)	0.63...1.13 mm 4.70...7.35 mm
TV connector	
Connector type	IEC-male
Frequency range	109...1006 MHz
Tap loss	12 dB ±1.0 dB
Radio connector	
Connector type	IEC-female
Frequency range	87.5...125 MHz
Tap loss	13 dB ±1.5 dB
DATA connector	
Connector type	F-female
Frequency range	5...1006 MHz
Tap loss	12 dB ±1.0 dB
Isolation TV↔DATA @ 5...65 MHz	≥ 60 dB
Isolation TV↔DATA @ 109...1006 MHz	≥ 30 dB
Isolation R↔DATA 1/2 @ 5...65 MHz	≥ 60 dB
Isolation R↔DATA 1/2 @ 87.5...108 MHz	≥ 30 dB
General	
Dimensions (W × H × D) appr.	68 × 68 × 39 mm
Weight	0.104 kg

Suitable products

[SZU 2-03 Cover plate | TV/R/DATA/DATA | single piece](#)

[TZU 1-00 Surface frame](#)

[SZU 2-13 Cover plate | TV/R/DATA/DATA | two-parts](#)

[TZU 1-10 Surface frame](#)

[TZU 3-00 Terminating resistor](#)