

19" DYNAmic Basic

Free Standing Cabinets

Width: 600 mm
Depth: 1000 mm

Load Capacity: 600 kgs.

**U Height: 22U, 26U, 32U
36U, 42U, 47U**

Standards and Compliances:



ISO 9001
Quality Management System

EN 61587-1
Mechanical Structures for
Electronic Equipment

EN IEC 60297, 19" Mounting
EN IEC 60917 Overall Cabinet
Dimensions

EN/IEC 60529 - IP20 Ingress Protection
performance

EN/IEC 62262 - IK07 Mechanical
Impact Resistance

EIA/ ECA-310 (D/E) 19" 482,6 mm
and U 44,45 mm Height Sizing



CE conform to
EN 60950-1
Information Technology
Equipment, Safety,
Part-1: General Requirement

EN IEC 62368-1 Audio/Video, Information
and Communication Technology
Equipment
Part 1: Safety requirements



UL listed to
UL 2416, Outline of Investigation for
Audio/Video, Information and
Communication Technology Equipment
Cabinet, Enclosure and Rack
Systems; UL 60950-1 and CSA C22.2
NO. 60950-1-07, Information Technology
Equipment Safety
Part 1: General Requirements



Environment Friendly;
ISO 14001 Environmental
Management System
RoHS compliancy
%100 Recyclable Material

Standard Color:



RAL 7035 Light Grey



RAL 9005 Black




DYNAmic Series Networking Enclosures, with 19" w:600 mm and d:1000 mm physical sizes, with max internal usable depth and 6 different heights.

19" DYNAmic Basic


Free Standing Cabinets

Width: 600 mm
Depth: 1000 mm


Construction Drawings

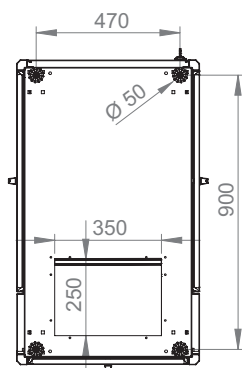


Bottom view

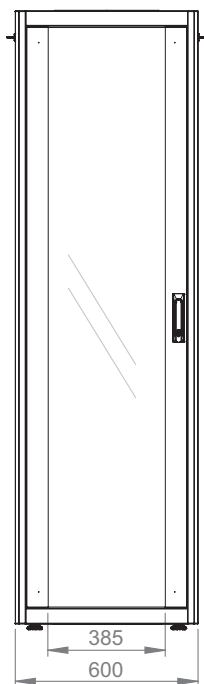


Front view

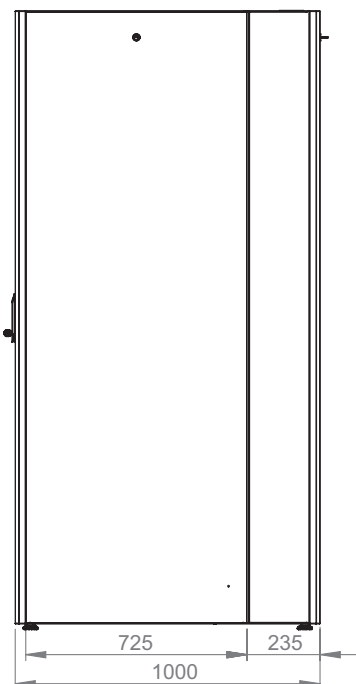

Side view

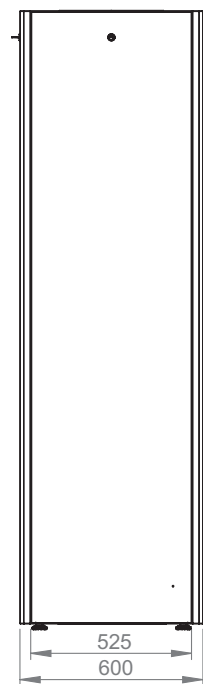

Front view

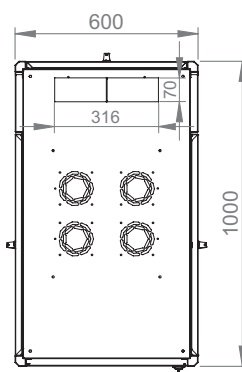


Top view

19" DYNAmic Basic

Free Standing Cabinets

Width: 600 mm
Depth: 1000 mm

Construction Drawings

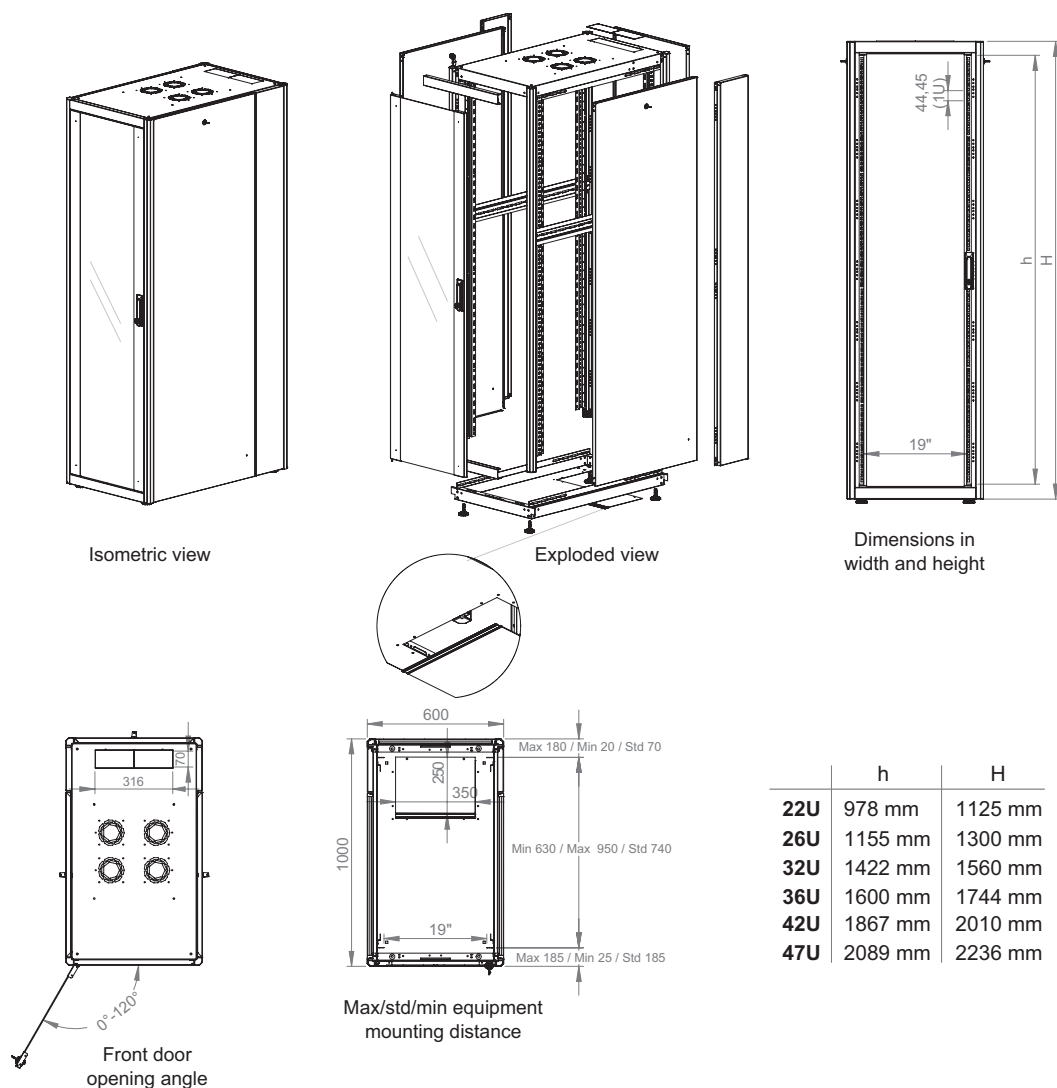

	h	H
22U	978 mm	1125 mm
26U	1155 mm	1300 mm
32U	1422 mm	1560 mm
36U	1600 mm	1744 mm
42U	1867 mm	2010 mm
47U	2089 mm	2236 mm

19" DYNAmic Basic Series Free Standing Cabinets W=600 mm D=1000 mm

Product Number***	Product Description	Size WxDxH mm	h Size in U	h in mm	*H mm, overall without feet and/or castor	Width Overall mm	Width Rail to Rail	Depth Overall mm	**Depth Shipping Conf. Rail to Rail mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Standard NET Weight of Product kgs	Gross Weight of Product kgs	QTY IN PALLET	PALLET DIMENSIONS WxDxH mm	Pallet Weight kgs
LN-DB22U6010-CC	22U 19" free standing cabinet W=600 mm D=1000 mm	600x1000x1125	22U	978	1125	600	19"	1000	770	1	680x1080x1180	64	66	1	680x1080x15	75
LN-DB26U6010-CC	26U 19" free standing cabinet W=600 mm D=1000 mm	600x1000x1300	26U	1155	1300	600	19"	1000	770	1	680x1080x1440	72	73,2	1	680x1080x15	82,2
LN-DB32U6010-CC	32U 19" free standing cabinet W=600 mm D=1000 mm	600x1000x1560	32U	1422	1560	600	19"	1000	770	1	680x1080x1440	80	82	1	680x1080x15	91
LN-DB36U6010-CC	36U 19" free standing cabinet W=600 mm D=1000 mm	600x1000x1744	36U	1600	1744	600	19"	1000	770	1	680x1080x1884	91	93	1	680x1080x15	102
LN-DB42U6010-CC	42U 19" free standing cabinet W=600 mm D=1000 mm	600x1000x2010	42U	1867	2010	600	19"	1000	770	1	680x1080x2150	96	99	1	680x1080x15	108
LN-DB47U6010-CC	47U 19" free standing cabinet W=600 mm D=1000 mm	600x1000x2236	47U	2089	2236	600	19"	1000	770	1	680x1080x2410	101	105	1	680x1080x15	114

* Please add 30 mm to H mm if used with adjustable feet, add 80 mm to H mm if castor set are used.

** See min and max adjustable depth variations on drawings.

*** CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering.

**** Unless defined delivery is in flat pack, please add A notation to the part number for assembled delivery ie. LN-DB22U6010-CC-A

***** The logistical information provided in above chart is based on assembled product since packing details of flat-pack is changing based on transport vehicle and the delivery location.

Please consider delivery notes, packing lists and recent data provided with the logistics services of Lande.