


CS[®] CONNECTOR

Reach higher density with CS[®]

NEW
Duplex connector
optimized for 400G
new generation
Data Center

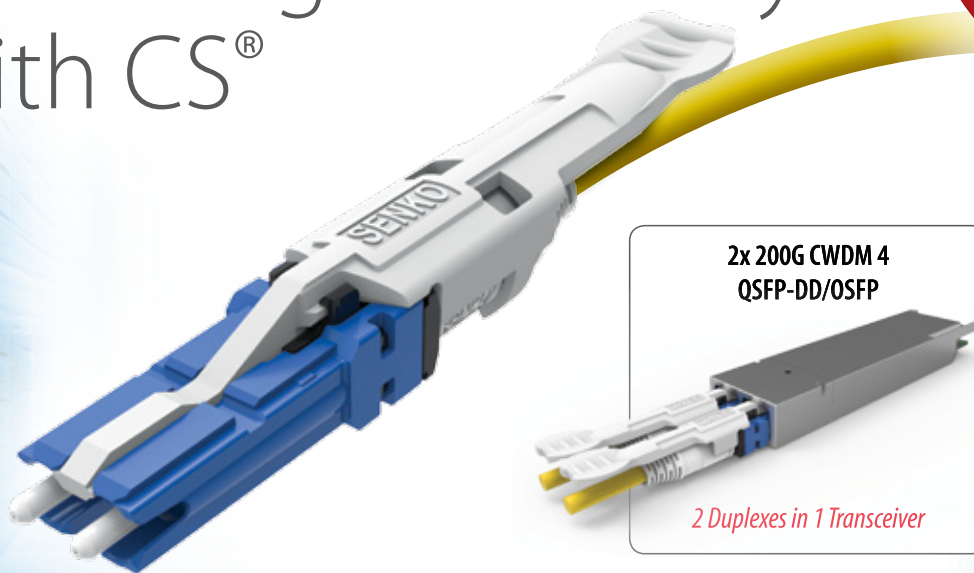


2x 200G CWDM 4
QSFP-DD/OSFP



2 Duplexes in 1 Transceiver

CS CONNECTOR VS. LC DUPLEX

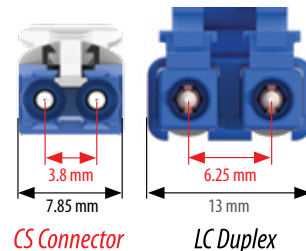


FEATURES

- 40% size reduction compared to LC Duplex
- Designed for OSFP/QSFP-DD Break out application
- Proven 1.25mm Ferrule technology
- Push/Pull tab
- IEC random mating Grade B




www.senko.com/cs

8 PORTS COMPARISON

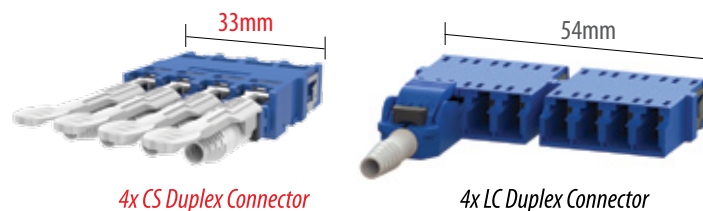

MAX. 336 PORTS IN 1U

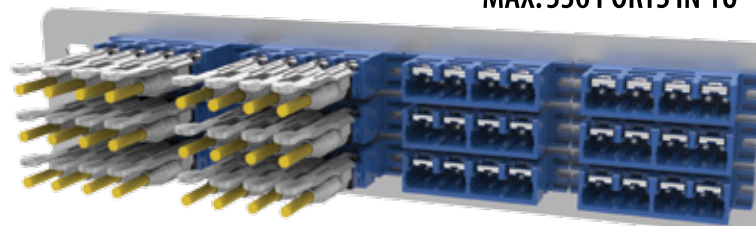

SENKO ADVANCED COMPONENTS, INC.

CALL 1-888-32-SENKO

America
USA EAST 1-888-32-SENKO
USA WEST 1-858-623-3300
TEXAS 1-972-661-9080
Sales-Americas@senko.com

South America
BRAZIL +55-21-3736-7065
Sales-Brazil@senko.com

Asia
HONG KONG +852-2121-0516
SHANGHAI +86-21-5830-4513
SHENZHEN +86-755-2533-4893
Sales-Asia@senko.com

Europe
UK +44 (0)1256 700880
ITALY +39 011 839 98 28
POLAND + 48 71 396 36 59
Sales-Europe@senko.com

Asia Pacific
AUSTRALIA +61 (0) 3 9755-7922
Sales-Asia-Pacific@senko.com

Japan
TOKYO +81 (0) 3 5825-0911
Sales-Japan@senko.com