

1. Basic Construction

		Tri-Shield
Conductor	Material	CCS
	Nom.Dia.	14AWG
Dielectric	Material	Foam PE
	Nom.Dia.	7.11mm
Shield	Material	Al foil+ Al Braiding+ Al foil
	Coverage	77%
Jacket	Material	PE
	Nom.Thick.	0.94mm
	Nom.Dia.	10.16mm






2. Basic Characteristics

Nominal Impedance(ohm)		75±3	
Nominal Velocity of Propagation(%)		85	
Nominal Capacitance(pF/m)		50	
Sparker Test(VAC)		4000	
SRL(dB)		20	20
Attenuation 【68°F (20°C)】	Frequency (MHz)	Maximum (dB/100ft)	Maximum(dB/100m)
	5	0.38	1.25
	55	0.96	3.15
	250	2.05	6.72
	300	2.25	7.38
	450	2.75	9.02
	600	3.18	10.43
	750	3.65	11.97
	865	3.98	13.05
	1000	4.35	14.27

RG1177T Coax Cable

3. Packing Details

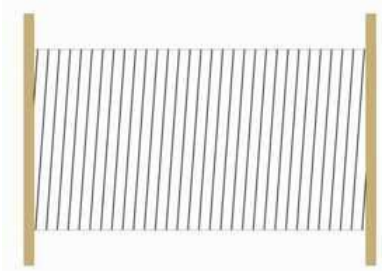Item No.:	RG11
Specification:	1.63CCS+7.11FPE+AL Foil Bonded+ AL Braiding+10.16PE
Packing:	305M/Wooden Spool, 1Wooden Spool/Carton
Wooden Spool Size:	12.5*38*37CM
Image:	 Wooden Spool
Carton Size:	39*39*38.5CM
G.W.:	29.43KG/Carton
N.W.:	26.43KG/Carton
Quantity in a 20 Feet Container	360Cartons

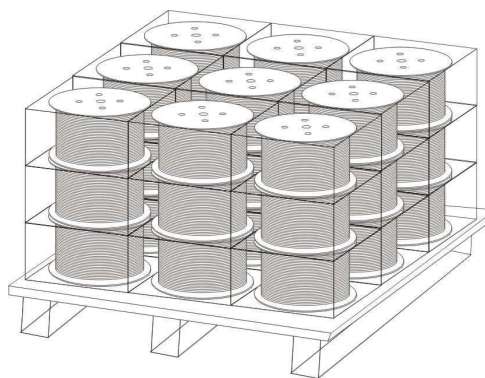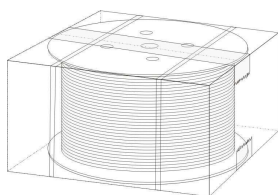

RG1177T Coax Cable

